



- PUBLIC PARKS
- STAIRWAYS AND PATHWAYS
- ENTRANCE AREAS
- PEDESTRIAN PRECINCTS



**CUBIC Wall fitting** with bracket.

Housing made of die-cast aluminium, aluminium, stainless steel, painted, toughened glass, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, invisible hardware, high performance mini-road reflector optics, □ 200mm, H: 360mm, protection category IP65, protection class I with option class II, featuring wall bracket of die-cast aluminium and terminal block, painted, standard colour: black [-2].



Mirror optics  
asymmetric




Mirror optics  
symmetric

**Wall fitting**

**SX 285** ■ ■ - ■

**HIT-CE\***

20W → 1 0		
LVK → 8088		
35W → 1 1		
LVK → 8088		
70W → 1 2		
LVK → 8088		
20W → 2 0		
LVK → 8089		
35W → 2 1		
LVK → 8089		
70W → 2 2		
LVK → 8089		

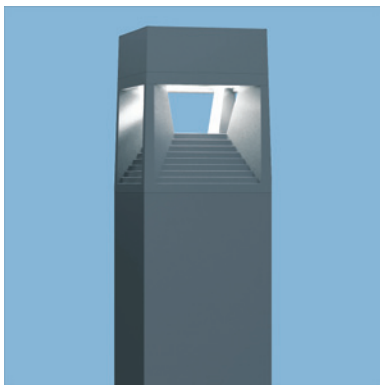


**CUBIC Bollard** for mounting on plinth or separate buried base.

Housing made of die-cast aluminium, aluminium, stainless steel, painted, toughened glass, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, invisible hardware, high performance mini-road reflector optics, □ 210mm, H: 1090mm, protection category IP65, protection class I with option class II, square aluminium column without door, painted, for mounting on plinth or separate buried base, supplied with IP54 fuse box 2x5x10mm<sup>2</sup> for loop in-and-out,

standard colour: black [-2].

**Bollard**

**SX 284** ■ ■ - ■




Mirror optics  
asymmetric



Mirror optics  
symmetric

**HIT-CE\***

20W → 1 0		
LVK → 8088		
35W → 1 1		
LVK → 8088		
70W → 1 2		
LVK → 8088		
20W → 2 0		
LVK → 8089		
35W → 2 1		
LVK → 8089		
70W → 2 2		
LVK → 8089		

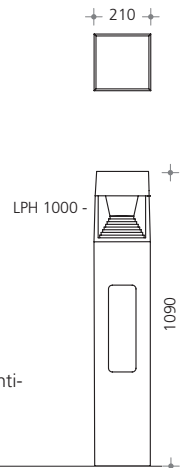

\*G12 base

Please complete reference no. with the relevant codes for optics, lamp and colour.

**Specification example:**

**SX 284 1 1 - 2**

**CUBIC Bollard**

**SX 284**

**asym., HIT-CE 35W**

**1 1**

**black**

**- 2**

**Colour code:**



black - 2, choice of colours - 9

**Buried base** of galvanised steel with flange and anti-sink plate, H: 500mm, flange plate □ 200mm, anti-sink plate □ 300mm **SX 97-071-0**



LVK → [selux.de/lvk](http://selux.de/lvk)