



HIGH
LIGHTS
2010

LANOVA





- PUBLIC SQUARES
- AREAS WITH REDUCED TRAFFIC
- COURTS D'HONNEUR
- MAIN AND MINOR ROADS
- PEDESTRIAN SPACES




LANOVA 230 Pole top lightstack with system pole.

Luminaire housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts, PMMA diffuser partly satin finished, high-performance symmetric or asymmetric Mini Road mirror optics, lamp replacement facilitated via compact removable terminal block, Ø: 230 mm, H: 720 mm, protective rating IP65, safety category I, safety category II optional, incl. Ø: 76/90 mm stepped cylindrical galvanised steel pole, painted, with extended

buried base and anti-sink plate set, CE approval in accordance with the Building Products Act, incl. IP54 2x5x16 mm² fuse box for through-wiring, pole height: 4100/800 mm, MH: 4640 mm, standard colour: graphite - mica finish [-4] other colours on request [-9+ colour code].





Windage area: 0.175 m², weight: 11.0 kg

Lightstack **SX 280** ■ ■ - ■ ■
incl. pole

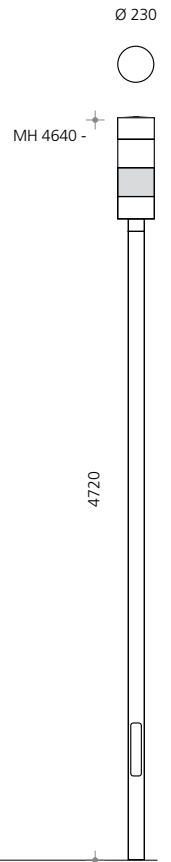

HIT-CE

20W → 3 0		
LVK → 7625		
35W → 3 1		
LVK → 7625		
70W → 3 2		
LVK → 7625		
20W → 6 0		
LVK → 7624		
35W → 6 1		
LVK → 7624		
70W → 6 2		
LVK → 7624		




LANOVA 300 Pole top lightstack with system pole.

Luminaire housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts, PMMA diffuser partly satin finished, high-performance asymmetric Medio Road mirror optics, ool-free maintenance, lamp replacement facilitated via compact removable terminal block, Ø: 300 mm, H: 890 mm, protective rating IP65, safety category I, safety category II optional, incl. Ø: 76/101 mm stepped cylindrical galvanised steel pole, painted, with extended buried base and

anti-sink plate set, CE approval in accordance with the Building Products Act, incl. IP54 2x5x16 mm² fuse box for through-wiring, pole height: 5100/800 mm, MH: 5735 mm, standard colour: graphite - mica finish [-4], other colours on request [-9+ colour code].


Windage area: 0.25 m², weight: 15.2 kg

Lightstack **SX 399** ■ ■ - ■ ■
incl. pole

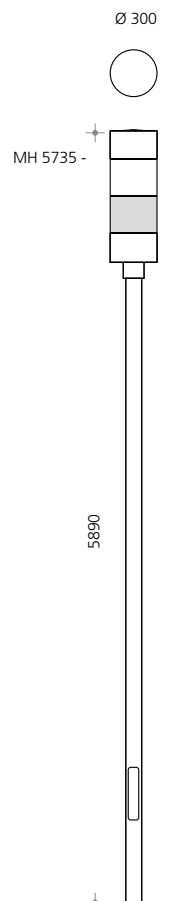

HST

50W → 1 0	70W → 1 1	
LVK → 8221	LVK → 8220	
70W → 1 2	100W → 1 3	
LVK → 8221	LVK → 8220	
	150W → 1 5	
	LVK → 8220	



** G8.5 base • * G12 base • Equipped with Philips Cosmopolis (CPO) on request

Wall mounted and double cluster versions available on request

- AREAS WITH REDUCED TRAFFIC
- MINOR ROADS
- PEDESTRIAN SPACES
- ARCADES
- ENTRANCE AREAS






LANOVA 250 Catenary suspended luminaire with two-way suspension.

Luminaire housing made of die-cast aluminium, aluminium, stainless steel, stainless steel threaded inserts, PMMA diffuser partly satin finished – high-performance Mini Road symmetric mirror optics, lamp replacement facilitated via compact removable terminal block, Ø: 250 mm, H: 395 mm, protective rating IP65, safety category I, safety category II optional, incl. two-way adjustable catenary suspension, through-wiring optional, standard colour: graphite - mica finish [-4], other colours on request

[-9+ colour code].

Windage area: 0.086m², weight: 10.0kg

Catenary suspended luminaire SX 282 ■ ■ ■

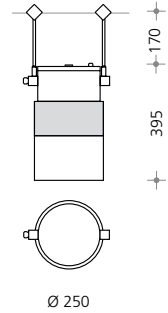

Mirror optics
symmetrical

HIT-CE

20W → 2 0		
LVK → 7626		
35W → 2 1		
LVK → 7626		
70W → 2 2		
LVK → 7626		





LANOVA 230 Pendant arcade luminaire with adjustable pendant tube.

Cylindrical upper section of luminaire housing made of die-cast aluminium (open using Allen head screws), painted, with a centrally fixed (by screws) pendant tube of max. 2400 mm with vibration-cushioned pendant mounting bracket for mounting in ceilings and Ø: 170 mm ceiling plate, designed for flush mounting in suspended ceilings and concrete ceilings; cylindrical lower section of luminaire housing made of PMMA, upper part satin finished, lower part transparent, cover plate in the form of a honeycomb

prismatic diffuser; all suspension components made of stainless steel, standard colour: graphite - mica finish [-4], other colours on request [-9+colour code].

Windage area: 0.15m², weight: 8.0kg

Pendant arcade luminaire SX 281 ■ ■ ■

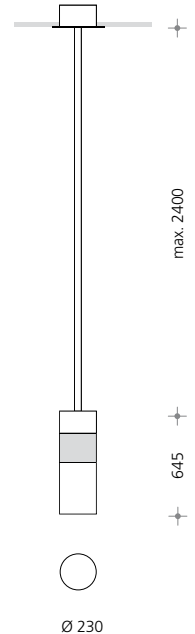

Mirror optics
symmetrical

HIT-CE

20W → 3 0		
LVK → 8220		

** G8.5 base • * G12 base

Please complete the reference no. with the relevant codes for optics, light source and colour choice.

How to order LANOVA 250 Catenary suspended luminaire HIT-CE 20W sym. graphite - mica finish
 SX 282 2 0 - 4 ■ SX 282 2 0 - 4 ■

Colour code: → - ■ ■ + graphite - mica finish , other colours - ■ ■ + colour code



